

RAYSTON FLOOR EP30 DECOR

DESCRIPTION


Dual-component 100% solids-based system based on epoxy resins, pigmented with metallic effects for protection of concrete surfaces and pavements.

TYPICAL APPLICATIONS

The Rayston Floor EP30 DECO system is an ideal choice for floor coverings in commercial premises, garages, shops and offices.

ADVANTAGES

- Excellent adhesion to concrete, mortar and stone support surfaces
- Good chemical resistance.
- Waterproof and non-porous.
- Very easy to clean.
- A wide range of colours
- Highly decorative.

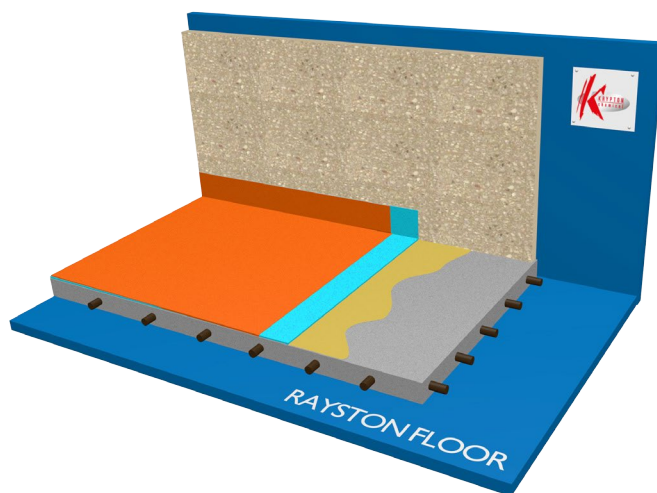

SYSTEM STEPS



Epoxy Primer 100

0.3–0.4 Kg/m²

Epoxy Primer 100

Second pigmented coat, add 5–7 g of metallic pigment per kg of resin to the comp. 48h before application.

0.7–0.8 Kg/m²



EP Nivel Clear

For each kg of resin, add 10–15 g of metallic pigment to the comp. 48h before application.

1–1.2 Kg/m²



Colodur ECO Mate ***

Add 10–15% water for better application.

0.1–0.15 Kg/m²

Colodur ECO Mate ***

Add 10–15% water for better application.

0.1–0.15 Kg/m²

Approximate system thickness 2

*** Colourless version (Gloss or Satin)

A product must be chosen from the varied options according to the needs of the support surface and the working conditions. For more information, please refer to the Rayston product data sheets.

The information contained in this data sheet — along with our advice, whether it be written, verbal or ascertained via testing — is provided in good faith based on our experience and results obtained from independent laboratory tests, however this does not constitute a guarantee for the user, who should consider it as a purely indicative reference with a strictly informational value only. All our systems and product data sheets are regularly updated. It is the customer's responsibility to obtain the latest version.