




RAYSTON FLOOR EP 10 W Thin Film System

DESCRIPTION: Dual-component system based on water-based epoxy resins, pigmented, with smooth or rough finish, for protection of concrete surfaces and pavements.

TYPICAL APPLICATIONS: The Rayston Floor EP 10 W system is an ideal choice for floor coverings in industrial premises, warehouses, car parks and more.

ADVANTAGES:

- Can be applied on surfaces with some residual moisture.
- Easy to apply.
- The absence of solvent allows this product to be used in indoors.
- Waterproof but vapour permeable system.
- High resistance to abrasion.
- Satin or gloss finish.

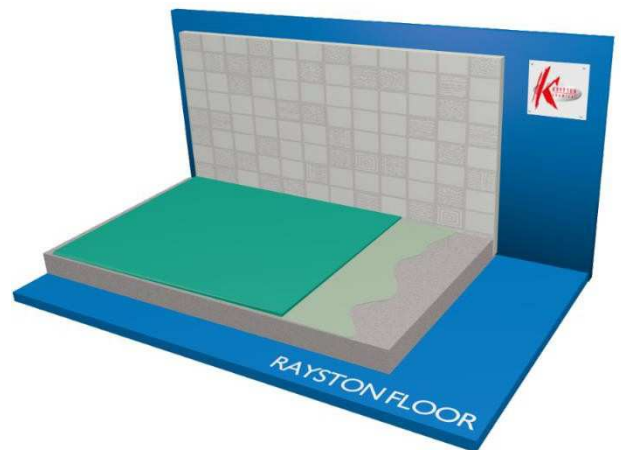

Approximate thickness of the system: 0.3–0.5 mm

SYSTEM STEPS

BASE: Concrete, > 28-day curing time, moisture <8%, no capillary moisture, strength >1.5N / mm², Temp. > 10°C, without any contamination, grease, dust or open pores.

PRIMER

Humidity Primer

0.4–0.5 Kg/m²

Water-based epoxy primer applied in two coats 0.2 –0.25 kg/m² each. Can be diluted with 10% water.

SURFACE COATING

EP Aquacoat

0.3–0.5 Kg/m²

Breathable water-based epoxy coating for protection of concrete surfaces and floors. Apply in two coats of 0.15–0.2kg/m² each.

Optional: To obtain an anti-slip finish, broadcasting 1 kg/m² aggregate with a granulometry of 0.1–0.5 mm on the first coat of EP Aquacoat.

A product must be chosen from the varied options according to the needs of the support surface and the working conditions. For more information, please refer to the Krypton product data sheets. The information contained in this data sheet — along with our advice, whether it be written, verbal or ascertained via testing — is provided in good faith based on our experience and results obtained from independent laboratory tests, however this does not constitute a guarantee for the user, who should consider it as a purely indicative reference with a strictly informational value only. All our system and product data sheets are regularly updated. It is the customer's responsibility to obtain the latest version.