

# RAYSTON FLOOR EP 30 DECO

## Self-leveling system.


**Description:** 100% solids bi-component system based on epoxy resins, pigmented with metallic effects for the protection of concrete surfaces and pavements.

**Typical applications:** The Rayston Floor EP 30 DECO system is an ideal choice for floor coverings in commercial premises, garages, stores, offices.

### Advantages:

- Excellent adhesion to concrete, mortar and stone substrates
- Good chemical resistance.
- Waterproof and non-porous.
- Very easy to clean.
- Wide range of colors.
- Highly decorative.
- Solvent free

Approximate system thickness 2 mm.

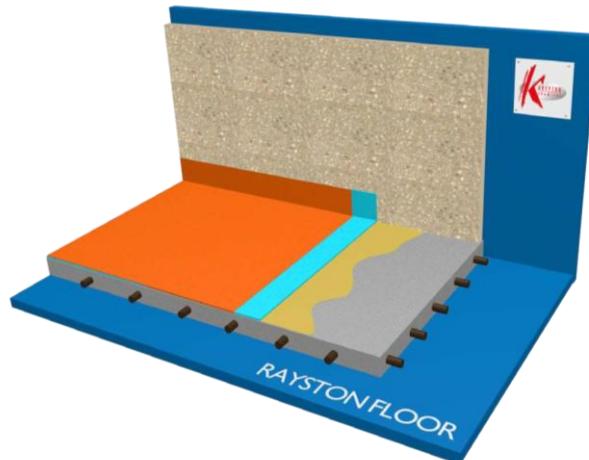

## SYSTEM STEPS

BASE: Concrete, > 28 days cured, moisture <4%, no capillary moisture, strength >1.5N / mm<sup>2</sup>, Temp.> 10°C, without any contamination, grease, dust or open pore.

### PRIMER

#### Rayston Epoxy 100

0.3-0.4 Kg/m<sup>2</sup> (0.3-0.4 Kg/m<sup>2</sup>)

#### Rayston Epoxy 100

Second pigmented coat, add 5-7 g of metallic pigment per kg of resin in the comp.B 48h before application.

0.7-0.8 Kg/m<sup>2</sup> (0.7-0.8 Kg/m<sup>2</sup>)

### MAIN LAYER

#### EP Level Clear

For each kg of resin, add 10-15 g of metallic pigment to the comp.B 48h before application.

1-1.2 Kg/m<sup>2</sup>

### TOP COAT

#### Colodur ECO Mate \*\*\*

Incorporate 10-15% of water for better application

0.1-0.15 Kg/m<sup>2</sup> (0.1-0.15 Kg/m<sup>2</sup>)

#### Colodur ECO Mate \*\*\*

Incorporate 10-15% of water for better application

0.1-0.15 Kg/m<sup>2</sup> (0.1-0.15 Kg/m<sup>2</sup>)

\*\*\* Colorless version (Gloss or Satin)

A product must be chosen from the varied options according to the needs of the support surface and the working conditions. For more information, please refer to the Rayston product data sheets. The information contained in this data sheet — along with our advice, whether it be written, verbal or ascertained via testing — is provided in good faith based on our experience and results obtained from independent laboratory tests, however this does not constitute a guarantee for the user, who should consider it as a purely indicative reference with a strictly informational value only. All our system and product data sheets are regularly updated. It is the customer's responsibility to obtain the latest version